




- Provides thermal and mechanical protection to roof membrane.
- Best-In-Industry Lifetime Warranty!
- Unmatched durability with years of maintenance-free performance.

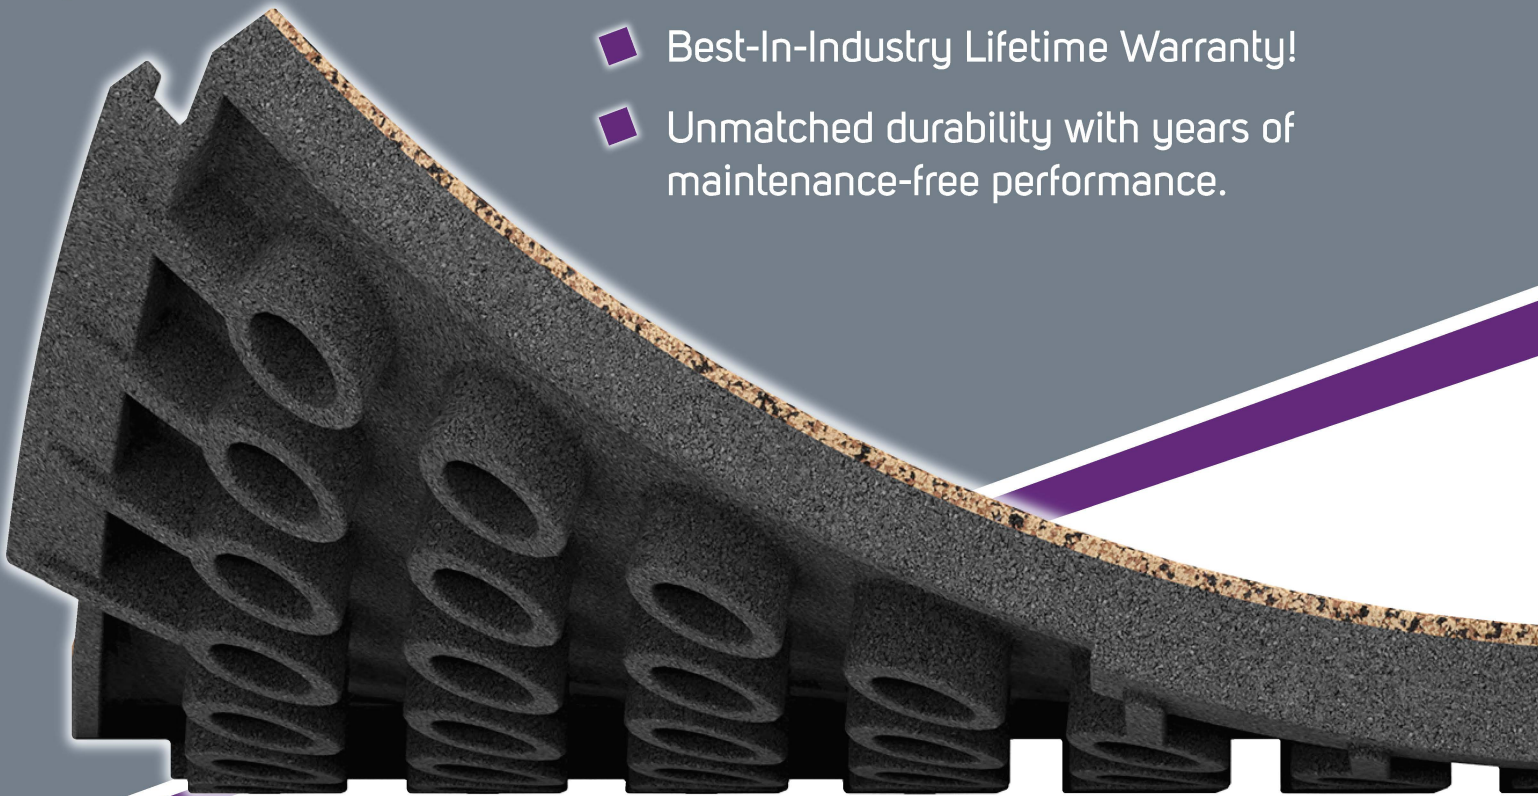

The toughest tile. Rain or shine.

No matter what your rooftop, walkway or patio project entails, **duraSTRONG™** rubber paving tiles provide the solution. Slip-resistant, affordable and able to withstand the toughest weather conditions, **duraSTRONG** tiles are perfect for both commercial and residential applications. Choose from a wide range of attractive colors and finishes or use **sofSURFACES'** new proprietary custom color rendering tool to suit your design requirements. We also offer an industry-leading Limited Lifetime Guarantee to ensure a strong surface every step of the way.



©2016 sofSURFACES Inc.

Distributed By:



www.centralconstructionsupply.com
(800) 950-4972

TURNING EMPTY SPACES INTO PEOPLE PLACES



STANDARD COLORS

PREMIUM COLORS

Available in 6 standard colors and an infinite range of premium color blends. **Customer-Favorite Premium color blends shown above.**

Keep your properties looking their best with duraSTRONG exterior rubber paving tiles. Slip-resistant and able to withstand the toughest weather conditions, duraSTRONG is perfect for any outdoor application. Our interlocking design and proprietary manufacturing process are the result of extensive testing and engineering backed by a best-in-industry Limited Lifetime Warranty.

- New Best-In-Industry Lifetime Warranty.
- Provides thermal and mechanical protection to roof membrane.
- Available in a large assortment of standard colours and premium color blends.
- Innovative Patented KrosLock Tile-Locking System.
- Maintenance Free!

PHYSICAL PROPERTIES

Test Description	ASTM Ref.	Plus	Premium	Test Lab	Test Date
Freeze Thaw	C67	—	No Deterioration	Element	08-12
Rubber Deterioration/Air Oven	D573	—	No Deterioration	Element	08-12
Abrasion Resistance	C501	205	77	DTL	04-12
Density	D3676	817 kg/m3	859 kg/m3	DTL	04-12
Slip Resistance	E303	44 Wet/51.25 Dry	72.25 Wet/63 Dry	QAI Laboratories	04-12
Slip Resistance	D2047	0.533	0.601	QAI Laboratories	04-12
Tensile Strength	D412 (Mpa)	0.661	0.636	DTL	04-12
Elongation at Break	D412	68.5%	35.3%	DTL	04-12
Tear Strength	D624 (kNm)	2.2	2.4	DTL	04-12
Peak Tear Load	D624 (N)	51	54.1	DTL	04-12
Flammability	D2859	Pass	Pass	DTL	04-12
Flammability – Roof Covering	E108	—	Class A	FMR	02-99

duraSAFE is manufactured to a dimension of 24.2" x 24.2" and compressed during installation to a dimension of 24" x 24".



turning empty spaces into people places...

Please note: An architect or engineer should be engaged prior to the design process in order to determine suitability of the product for a particular application. Every project is unique; therefore, it is important to consult the product details and installation recommendations during the design phase.